




**Smartascreen**



**Neetascreen**

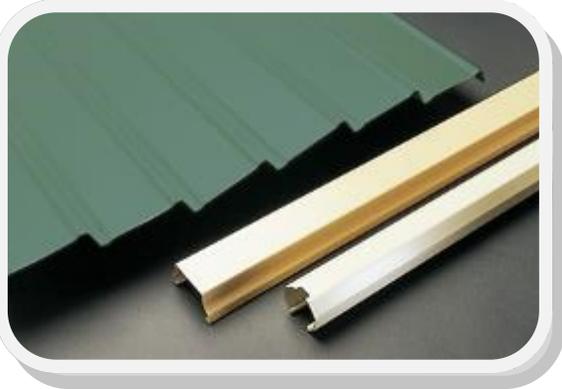

# Colorbond® Fencing



For an installation guide  
please go to

[http://www.lysaght.com  
/fencing/fencing-  
installation-information](http://www.lysaght.com/fencing/fencing-installation-information)

29-31 Auscan Crescent, Garbutt  
[info@fencingfactory.com.au](mailto:info@fencingfactory.com.au)



**Opening Hours:**

Monday-Friday: 8:00am-4:30pm

Saturday: 8:00am-12:00pm

Sunday: Closed

**TEL: 4725 6003 FAX: 4728 6003**

# Colorbond® Fencing

*A fence made of COLORBOND® steel is a secure, strong and beautiful addition to your home.*

- ◆ Available in a choice of 14 designer colours.
- ◆ Strong and durable.
- ◆ Easy to maintain.
- ◆ Won't rot, burn or be eaten by termites.
- ◆ Enhances the security of your home and family.



The modular LYSAGHT NEETASCREEN® is one of the most versatile and durable fencing systems you can buy. The COLORBOND® pre-painted steel finish with vertical ribbed TRIMWALL® panels provide strength and simple assembly.

## COLORBOND FENCING

Panel Size: 2.35m wide

### Neetascreen

2.1m	\$192.00
1.8m	\$171.00
1.5m	\$151.00
1.2m	\$130.00

### Smartascreen

2.1m	\$192.00
1.8m	\$171.00
1.5m	\$151.00
1.2m	\$130.00

### Miniscreen

2.1m	\$278.00
1.8m	\$254.00
1.5m	\$224.00
1.2m	\$196.00

### Gates

Fittings include: Frame, Infill Sheet, Rail, Post, Cap, Hinges and Key Lock

Neetascreen or Smartascreen Styles

<b>Double Gate</b>	1.8m	\$1,317.00
Suits a 3340mm opening	1.5m	\$1,193.00
<b>Single Gate</b> 930mm opening	1.8m	\$658.00

Single gate packs include 1 post and doubles include 2

### Powdercoated Galvanised Steel Posts

2.4m 50x50	\$35.40	Intermediate Supports
2.4m 65x65	\$47.75	Corner and End Supports

All pricing is including GST. Valid from September 2019

Simple maintenance of COLORBOND® steel by regular washing with water, will not only enhance its life but maintain its attractiveness for longer periods. Areas not regularly washed by rainwater should be hosed down at least every six months and more frequently in coastal areas/high levels of industrial fallout occur.

In cases where the regular maintenance referred to above does not remove all dirt, the following procedure should be carried out:

- Wash the surface with a mild solution of pure soap or mild non-abrasive kitchen detergent in warm water with a soft sponge or soft cloth.
- The COLORBOND® should be thoroughly rinsed with clean water immediately after cleaning to remove traces of detergent.

If cared for in accordance with these instructions, your building components made from COLORBOND® pre-painted steel and ZINCALUME® steel will give many years of low maintenance life.

